

Density Variation and Climate Differentiation in China— Comparative Study on Compaction Models for five Chinese Cities: Harbin, Tianjin, Wuhan, Chongqing and Shenzhen

Wenli Dong *, Steffen Lehmann *, Jamie Mackee*

* School of Architecture and Built Environment, the University of Newcastle,
University Drive, Callaghan, NSW 2308, Australia. Email:
Wenli.Dong@studentmail.newcastle.edu.au

Abstract

Strategies to increase the urban density are now pursued by many cities in the world through intensification strategies. In China, the density of the metropolises is usually much higher than that of western cities. The analytical studies of Chinese cities offer a better understanding of the relationship between climate, density and urban form. They can be examined as precedents for better future solutions. Thus the models of existing urban form in high density cities in China are worth a closer investigation.

In this paper, the authors have analyzed the density of Chinese cities statistically with climatic indicators. A close qualitative case study is followed on districts of five representative cities located in four distinct and different climatic zones. The influencing indicators of climate modality in the holistic sustainability evaluation framework are found; the recommendations for better urban practices are proposed at the end of the research. This paper forms part of data analysis in the author's higher research degree thesis.


Introduction

Sustainable development can be described as a journey towards the goal of sustainability. The concept of sustainable development was widely accepted in 1987 after the Brundtland Commission definition of sustainability: 'to meet the needs of the present without compromising the ability of future generations to meet their own needs' was published.¹ In 1992 the Earth Summit in Rio de Janeiro presented Agenda21 marking the milestone of sustainable development with 27 principles and the recognition of integrated concerns in decision making about environment and development.² A complex system to manage ourselves, individually and collectively is required.³ Traditional reductionist methods of analysis which breakdown and isolate the component parts will bring the risk of fragmented decision making with potential unforeseen consequences. Systemic, holistic goal-directed and hierarchical assessment of sustainability is strongly needed.⁴

Entering the 21st century and distancing itself from its early planned economy there are now new economic and social imperatives in China. However, in the last twenty years Chinese cities have confronted serious problems of balancing fast, intensive economic and urban development while attempting to achieve sustainability.⁵ Meanwhile, many of the urban theories and sustainability evaluation methods applied to Chinese cities have been appropriated from western models of urban development. Since the concept of sustainability is value-based and values can vary over time and

Green Fields, Brown Fields, New Fields: Proceedings of the 10th Australasian Urban History, Planning History Conference. Conference held at the University of Melbourne, 7–10 February, 2010.
This paper has been fully peer reviewed by the UHPH 2010 Expert Review Committee.

The world consists of human activity and natural phenomenon in mutual interactions which change over time. The framework developed in this research inherits the character of ‘ordinal loops’ of philosophical diagram in Chinese indigenous knowledge that is suitable for the sustainability evaluation framework. In this framework the ‘ordinal’ is represented in ‘individual-collective axis’. ‘Loop’ is represented in cyclical structure (Fig 1).



China covers a vast area with various climatic zones, and thus great climatic distinctions exist in the cities from Northeast to the South. The urban density of Chinese cities also varies widely. This paper mainly focuses on the city level of density comparison of 85 cities across the nation and the urban form parameters of five large Chinese cities at district level. The five selected cities Harbin, Tianjin, Wuhan Chongqing and Shenzhen are located in four distinct and different climatic zones: very cold zone, cold zone, hot summer-cold winter zone, and hot summer-warm winter zone.

Literature review

Recent theories of sustainable urban form have seen prominent development both from qualitative to quantitative and from the view of developed countries to developing cities.⁷ Interdisciplinary researches are questioning and reflecting on this concept⁸. There is also research in recent years agreeing that urban form is determinant for ecological footprint variation and CO₂ emissions.⁹ Insight beyond the intensification and mixed-use, more urban approaches towards sustainability are raising people's attention.¹⁰ All are making the compact city related developments necessary to be tested and properly guided, especially in Chinese cities which usually have higher population densities.

Unfortunately, there is not much work that has been conducted on Chinese compact cities in recent years. With close examination on these works, it is found that the existing discussions on the density and mixed-use are scarcely related to sustainability. Since the density zoning discussions emerged after 2000, more and more authors start to focus on the empirical methods based on GIS technologies.¹¹ The common characteristic of these empirical research studies is that they adopt the research techniques in a technocratic way which greatly relies on the GIS and modelling technologies. However the lack of reliable data sources for GIS modelling greatly limits such research. The cities in the case study are confined to Beijing and Shanghai.¹² More analysis is required to find out the best practice in the context of China. Therefore, the methodology in this paper will try to avoid analysis of data which is impossible to find.

So far, most of the existing research on urban climate has focused on the impacts of the built environment on the micro climate and strategies against Climate Change.¹³ There are also studies on the techniques in solar access and sunlight spacing.¹⁴ There is no research revealing the certain climate factors that would particularly affect density and other sustainability modalities of the built environment. From the literature, it is found that two main gaps in the knowledge about the relationship between urban climate and built environment sustainability in China. First, the focused cities in existing quantitative analyses have primarily confined. Secondly, the influencing climate indicators that would affect urban form are lacking.

Synthesized from above, the aim for this paper is to propose recommendations on best practice in urban form in different climatic zones of China and find out the influencing indicators of urban climate which is one of the sixteen modalities in the Holistic Sustainability Evaluation Framework for Asia-Pacific Regions (HSEFA). This paper forms part of data analysis in the author's higher research degree thesis (Fig 2).

Conceptualization

Urban population in this research refers to non-agricultural population in the built-up urban area. Basically, China's diverse statistical data on urban population is based on both the urban administrative system and the residence registration (hukou) system. The later classifies all the people either as 'agricultural population' or 'non-agricultural population' and is quite stable; the definitions of the former however,

have changed in each of the five national censuses.¹⁵ This research uses the urban population data of 85 cities sourced from Yearbook 2006 and the fifth national census. For five case study cities, the administrative system uses the 2000 yearbook which was compiled in the same year of fifth national census.

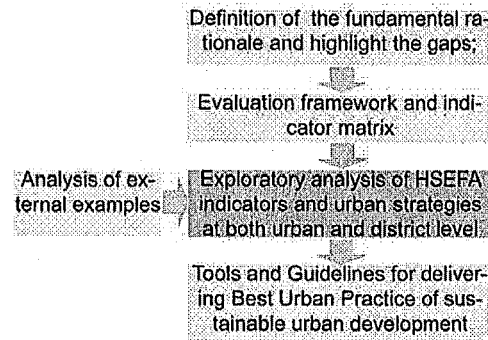


Fig 2: Position of this paper in the objectives of whole project

However, population mobility in China has risen dramatically, especially in major cities such as Beijing, Guangzhou, Shanghai where large numbers of ‘floating population’ from the countryside congregate. Nevertheless, the national census includes those in the population who hold Temporary Residence Certificate (TRC). This population accounts for most of the floating population in Chinese cities except the super cities which are not included in the sample.

Research design and methodology

In analysis, both statistical and qualitative methods will be used. Given the two-fold complexity of sustainable issues and urban systems, the strength of one approach is useful for informing the other.¹⁶ According to the sustainability evaluation framework in this research, the macro scale strategies correspond to the quantitative indicators. For the statistical analysis PASW Statistics¹⁷ will be used. The micro scale strategies correspond to the qualitative criteria. NVIVO 8.0 will be used for qualitative data and coding (Fig3).

Multivariate analysis and clustering will be used for factor analysis. The result of factor analysis can explain the total covariance of quantitative indicators in terms of smaller number of underlying factors.¹⁷ So here it could evaluate the significance of climatic indicators and make quantifiable comparison between 85 cities. Cross-Case analysis is the chief method for the purpose of deepening understanding of the generic processes or explanation that occurs across individual cases.¹⁸ The selection of the five cities aims to ensure variety and opportunities to learn in the search for the best urban practice.¹⁹

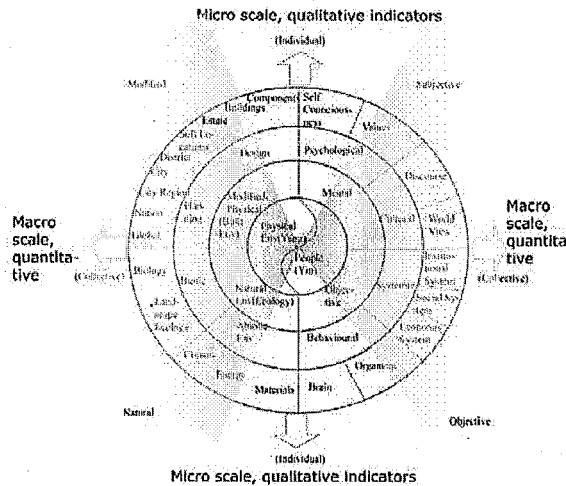


Fig 3: Hierarchical modalities of HSEFA and quantitative-qualitative division structure

The estimated details of analysis outputs are: summary of the influencing urban indicators, presented in a correlation table and scatter graph; Recommendations on design strategies and design tools for sustainable development are presented in cross tables. The result of this research will have significant implications, including:

- Providing approaches for best practice in urban development and sustainable evaluation method which is based on the eastern way of thinking and the practice in Chinese cities;
- The investigation of Chinese cities with higher densities offers possible strategies for intensive developments which are pursued by many cities in the world;

The first step in this paper is to identify the climatic indicators from literature review and collect density data of selected cities. The second step is to conduct exploratory data analyses using K-means cluster analyses method and ANOVA analysis method. In the second part of the research, in order to better analyse the density variation among the districts with similar cultural and physical environments, first it is necessary to identify the variables for the density variation, and to identify the variables of climate that affect built environment. A combinational analysis of quantitative and qualitative methods is presented in the later chapters.

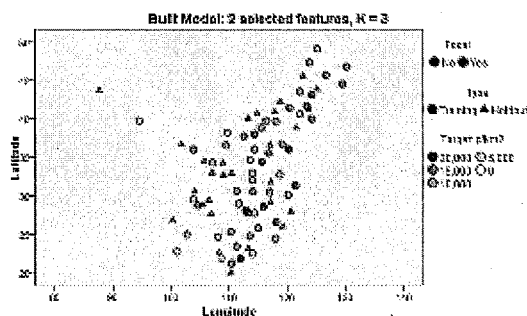



Fig 4: Spatial distribution of 85 selected cities in China

Eighty five Chinese Cities which will cover middle and east of China are selected for the first step analysis (Fig4). Convenience sampling method is used during preliminary research. The five Chinese Cities: Harbin, Tianjin, Wuhan, Chongqing and Shenzhen, each located in four zones, will be examined for this study in the second part of the paper (Table1). They are chosen for similar city scale and arithmetical latitudes.

Table 1: The selected cities for this research

City	Latitude (N)	Longitude (E)	Population (thousand)	Urban Area (km ²)	Population Density (p/ km ²)	
Harbin	45°58'	126°43'	3753	318	933.2398	
Tianjin	39°06'	117°12'	7468	530	1037.4764	
Wuhan	30°37'	114°08'	7542	225	943.4424	
Chongqing	29°31'	106°29'	4776	492	1439.835	
Shenzhen	22°23'	114°03'	8114	703	932.0184	

Variables identified: climate indicators

In order to analyse the density differentiation in different climatic zones, the climate indicators are indentified from a Climate Consultant to bridge the climate information of each city and their built environment. This software is used to chart the climate data of each city in the EPW format which are sourced from the Weather Data Sources page. The psychometric chart shows the most appropriate time that passive design strategies are required for each city. According to the chart, the six most important climate indicators are identified as main indexes as well as seven subsidiary indexes (Table 2).

Table 2: Climate indicators (hrs)

Category	Climate indicators	Criteria
Main Index	Conventional Air Conditioning	Hours when none of the other strategies can provide comfort conditions and so some form of cooling is required
	Conventional Heating	Hours when none of the other strategies can provide comfort conditions and so some form of heating is required
	Humidification	Humidification is needed below dew Point Temperature 2.2°C
	Internal Heat Gain	Max. 5.6°C Dry Bulb Temperature Difference below Comfort Low
	Sun shading	Min. 21.1°C Comfort Dry Bulb Temperature Min. 157.7 Wh/sq.wt Global Horiz. Radiation
	Wind Protection	Min. 4.5 m/s Velocity above which Wind protection is desirable Max. 11.1°C Dry Bulb Temperature Difference above Comfort High
	Comfort	Min. 21.1°C Comfort Dry Bulb Temperature Max. 23.9°C Comfort Dry Bulb Temperature Min. 2.2°C Dew Point Temperature Relative 80% Humidity at Comfort Low Temperature
Subsidiary Index	Direct Evaporation Cooling	Max. 18.7°C Wet Bulb set by Max. Comfort Zone Wet Bulb Min. 11.4°C Wet Bulb set by Min. Comfort Zone Wet Bulb
	High Thermal Mass	Max. 8.3°C Dry Bulb Temperature Difference above Comfort High Min. 2.8°C Nighttime Temperature Difference below Comfort High
	High Thermal Mass/Night Flushing	Max. 16.7°C Dry Bulb Temperature Difference above Comfort High Min. 2.8°C Nighttime Temperature Difference below Comfort High
	Natural Ventilation Cooling	2.2°C Dry Bulb Temperature Increase Above Comfort High Min. 1.3 m/s Outdoor Air Velocity for Comfort Max. 90% Relative Humidity Max. 22.2°C Wet Bulb Temperature
	Passive Solar Direction Gain High Mass	Min. 157.7 Wh/sq.mt. Beam Radiation for 5.56°C Temperature Rise 3 hrs Thermal Time Lag for High Mass Buildings
	Passive Solar Direction Gain Low Mass	Min. 157.7 Wh/sq.mt. Beam Radiation for 5.56°C Temperature Rise 12 hrs Thermal Time Lag for High Mass Buildings

The above criteria are from Climate Consultant 3.0 (<http://www.aud.ucla.edu/energy-design-tools>)

Statistical analysis on 85 cities

The correlation analysis on 85 cities reveals that natural ventilation cooling is statistically significant ($p=0.004$). High thermal mass, conventional heating and Conventional Air Conditioning are more related to urban population density than other indicators. But the correlations are not statistically significant (Table 3). The graphs below show the scatter points of the four analyses (Fig5).

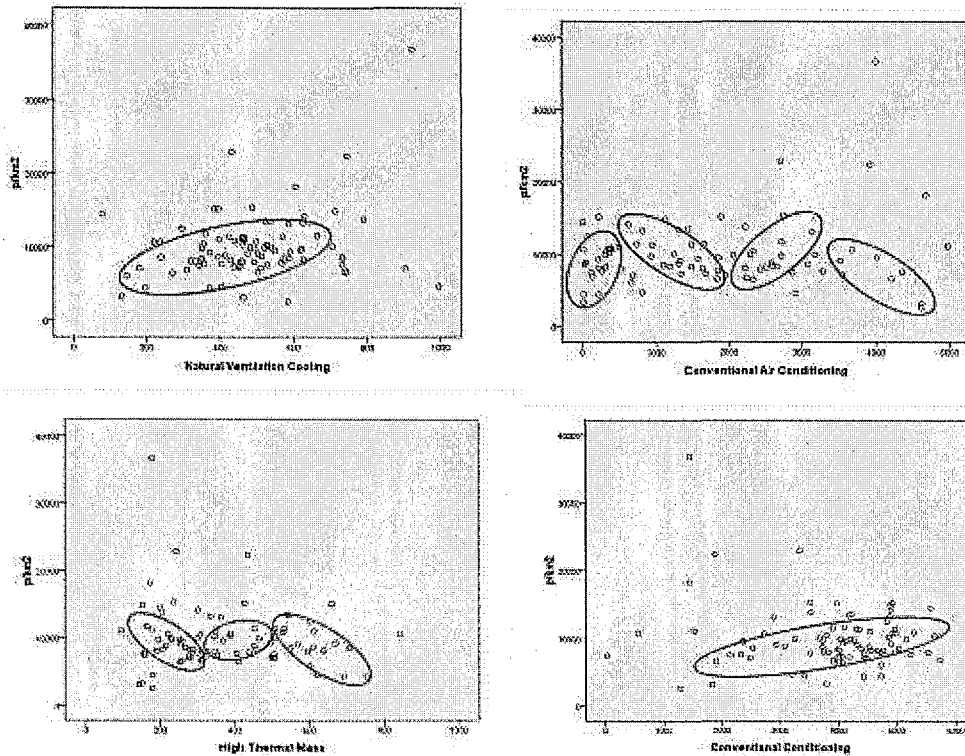


Fig 5: Scatter plots of four significant density-climate relationships

Table 3: 85 Cities correlation analyses

		p/km ²	Comfort	Sun shading	High Thermal Mass	High Thermal Mass/Night Flushing	Direct Evaporation Cooling	Natural Ventilation Cooling
Density (p/km ²)	Pearson Correlation	1	-.024	.124	-.147	.025	-.077	.310**
	Sig. (2-tailed)		.825	.257	.181	.819	.485	.004
	N	85	85	85	85	85	85	85
		Internal Heat Gain	Passive Solar Direction Gain Low Mass	Passive Solar Direction Gain High Mass	Humidification	Wind Protection	Conventional Air Conditioning	Conventional heating
Density (p/km ²)	Pearson Correlation	.005	-.106	.040	-.080	-.089	.172	-.169
	Sig. (2-tailed)	.966	.336	.719	.464	.416	.115	.123
	N	85	85	85	85	85	85	85

** Correlation is significant at the 0.01 level (2-tailed)

* Correlation is significant at the 0.05 level (2-tailed)

Overlay scatter plots show that the combination of two or more climatic factors would affect the urban density much more significantly. For example, the linear regression analysis reveals that sun shading and internal heat gain together affects the density to be more statistically significant ($\beta = -1.133$, $t(162) = -1.712$, $p = 0.089$ (Fig6).

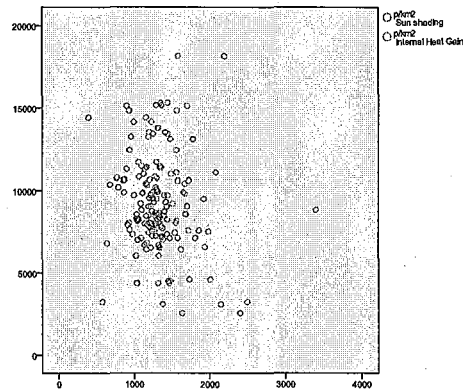


Fig 6: Overlay scatter plots of all density-climate relationships and overlay of sun shading-internal heat gain

For further investigation, cluster analysis is used to find out whether two or more climatic factors would affect the urban density. With the purpose that the cluster may be in accordance to the existing climatic zoning, the number of target clusters is set to be four. The result represents an equal distribution with similar number of cases in each cluster (Table 4).

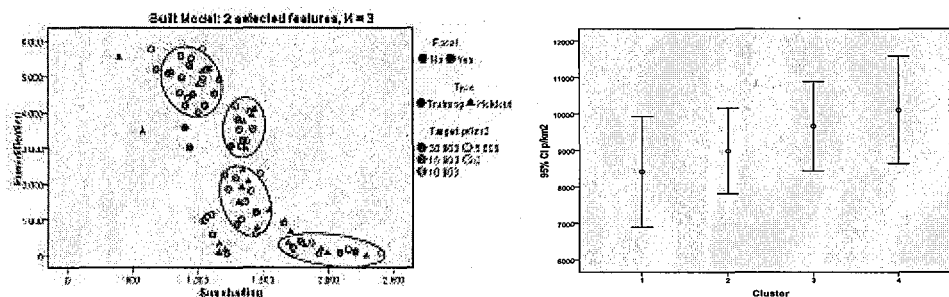


Fig 7: Sun shading- Humidification Cluster

Table 4: Details of clusters

		Cluster			
		1	2	3	4
Cluster Centres	Sun shading	1726	1303	915	1199
	Humidification	299	1608	5100	3650
Number of Cases in each Cluster		23	18	22	20

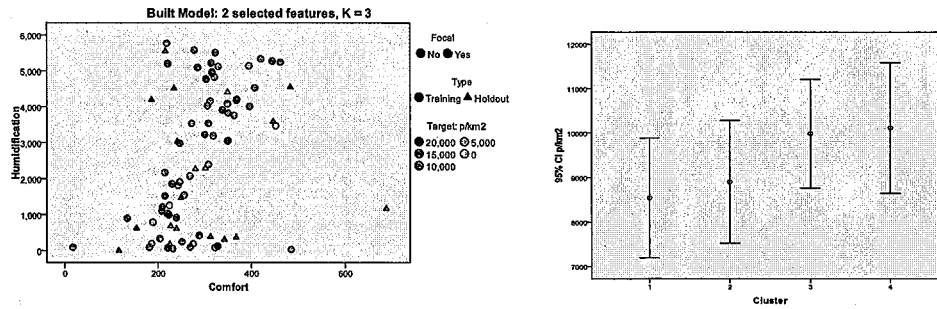


Fig 8: CI plots of densities variations in sun shading- humidification cluster and comfort- humidification Cluster

The CI plots shows that the population density varies when sun shading index increases and the humidification index decreases (Fig7). But the ANOVA analysis shows there is no statistically significant difference between the four zones $F(3, 81) = 1.33, p = 0.270$.

The four clusters of humidification- comfort include 26, 15, 20, 20 cities in each cluster. But there is also no statistically significant difference between the cities in different humidification-comfort clusters, $F(3, 79) = 1.51, p = 0.219$ (Fig8). This is similar to Conventional Conditioning-Humidification clustering. When there are two clusters, there is statistical significance between climate clusters ($M = 8675.54, SD = 2964.790, M = 10052.31, SD = 2855.682, t(78) = -2.115, p = 0.038$). But when there are four clusters, there is no statistically significant difference between densities in climate clusters, $F(3, 78) = 0.854, p = 0.469$. Even in two climate clusters, the density difference is not significant enough when the entire six main climate indexes are considered ($M = 8709.38, SD = 3019.399, M = 9956.13, SD = 2838.887, t(78) = -1.903, p = 0.061$ (Fig9).

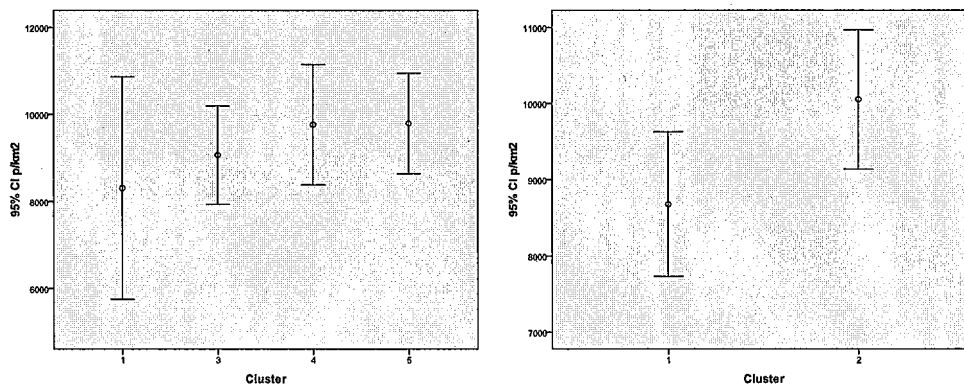


Fig 9: CI plots of densities variations in conventional conditioning-humidification cluster

Case study on density variation of five cities: districts and variables


A city is a complicated entity. Besides architecture, natural physiognomy like mountains, rivers, lakes and basins also contribute to the spatial distribution of the density. The various physical details of urban space, including the orientation of the streets and the buildings with respect to the sunlight direction are possible to provide a

wide range of sunlight conditions in a given level of density.²⁰ So the relationship between the urban density and climate differentiation couldn't be studied solely on the level of the whole city area. Instead, viewing from the micro scale is needed.

Considering the multiplicity of influencing elements, it will be convenient and efficient to integrate the districts of similar characters. So the districts under the administration of boroughs are more appropriate units for analysis. It provides sub-division of the whole city area into different districts according to their different terrain, the orientation of the streets, street grid, transport facility and history. Research on the land grading of Wuhan provides a good example. It shows that building density, FAR, residential density, and green space are correlated to each other.²¹ Based on these parameters, the districts are graded into five classes from A to E (Table 5). As the level rises from 1 to 5, the building density, FAR (Floor Area Ratio) and residential density (p/ha) rises, while the quality of green space gradually falls.

Table 5: Example on districts grading of Wuhan

Level	Building Density	FAR(Floor Area Ratio)	Residential Density (p/ha)	Green Space
A	Below 10%	Below 0.5	Below 200	Very good
B	10%~20%	0.5-1.0	200-400	Good
C	20%~30%	1.0-1.5	400-600	Average
D	30%~40%	1.5-2.0	600-800	Poor
E	Above 40%	Above 2.0	Above 800	Very Poor



The above is from Zhang, H. (2006). Study on the Thermal Environment of the City Based on the Simulation under Atmospheric Environment Impacts. Architecture of Science and Technology. Wuhan, Huazhong University of Science&Technology. M. Arch: 107.

Based on this requisite, 426 sub-districts of Shenzhen (51), Chongqing (99), Wuhan (91), Harbin (106) and Tianjin (79) become the pool of research samples. All of the selected cities have several districts with cultural heritages dated back to the early 20th century. The street grids are all around 1km². The density distributions of the five cities are mapped out in 2D and 3D format for general view in table 6.

A set of quantitative indicators to characterize urban forms at the metropolitan level are developed to distinguish compactness from sprawl.²² The indicators of the above cities are calculated in order to better understand the dimensions of density distribution (Table 7).

Unfortunately, there is still no substantial evidence from the calculations above. So an in-depth investigation into the variation among the districts with similar cultural and physical environments is strongly needed. The urban form parameters are indentified as categorical variables: green space, lake, history, rail, river, street grid-mix and free, street grid-radial, street grid-South, street grid-SE, street grid-SW.

All the districts that meet any two variables from each variable category are calculated for their mean population density. For example, there are 49 central urban districts that have rivers and are sourced from three cities with significant humidification index. They are composed of 4 districts from Harbin, 23 from Tianjin, and 22 from Wuhan. The average population density of the 49 districts is 32519.4p/km².

Table 6: Population Density Map of Selected Cities

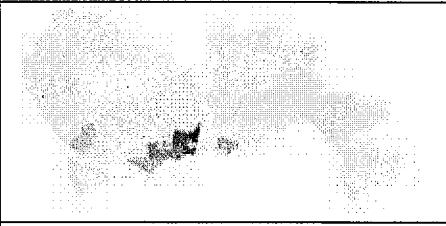
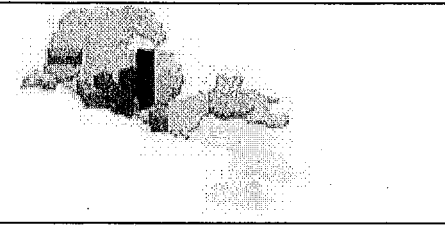
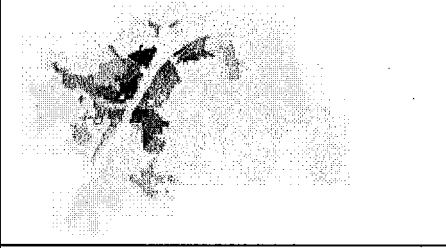
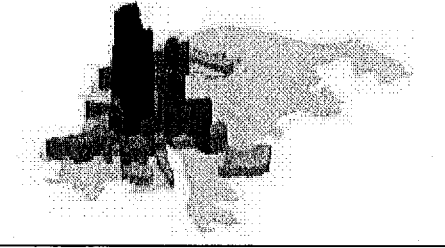

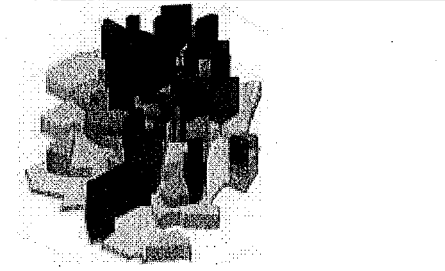
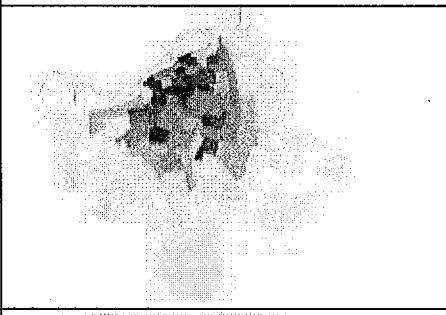
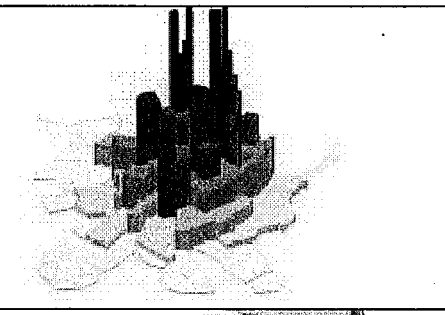
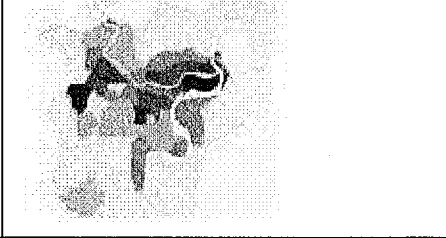
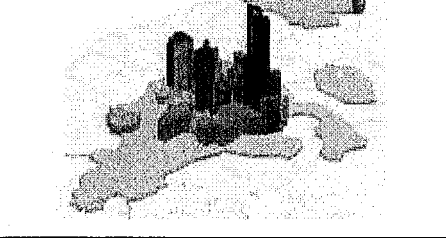
City	Density map	3D View of Density
Shenzhen		
Wuhan		
Tianjin		
Harbin		
Chongqing		

Table 7: Results of the urban form indicators

Dimension	Urban form indicator	Shenzhen	Chongqing	Wuhan	Tianjin	Harbin
D1: Metropolitan Size	Administrative Area(km2)	1952	7152	8494	7418	4275
	Construction Area(km2)	713	492	220	530	302
D2: Metropolitan Density	Overall activity intensity in a metropolitan area	932.018	1439.835	943.442	1037.476	933.240
D3: Degree of Equal distribution	Gini coefficient (Population- or Employment-based)	0.314	0.503	0.635	0.312	0.553
D4: The sprawl index (SI)	To measure residential sprawl for metropolitan areas	50.268	49.597	49.740	49.581	50.048

The CI plot (Fig10) shows that there is statistically significant differences between the mean densities of different climate indexes, $F(12, 106) = 6.68, p < 0.001$. From Fig11, there is also statistically significant differences between the mean densities of districts with different parameters, $F(8, 106) = 7.75, p < 0.001$.

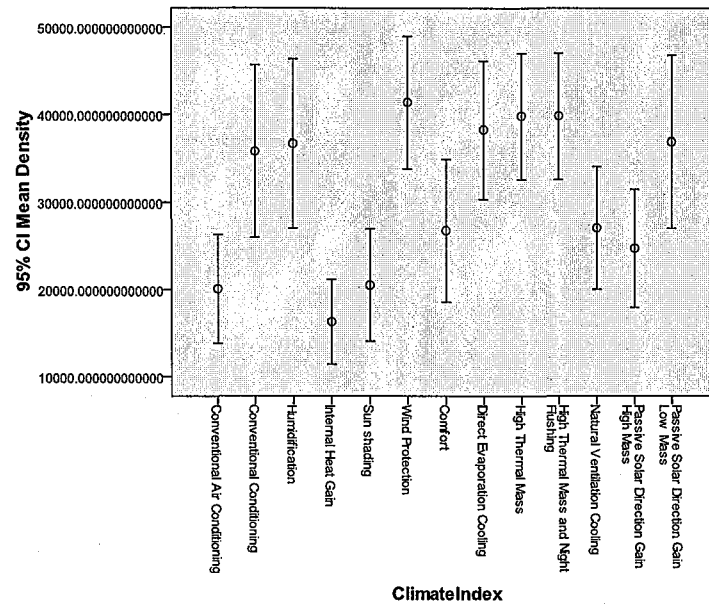


Fig 10: Density variation among climate indicators

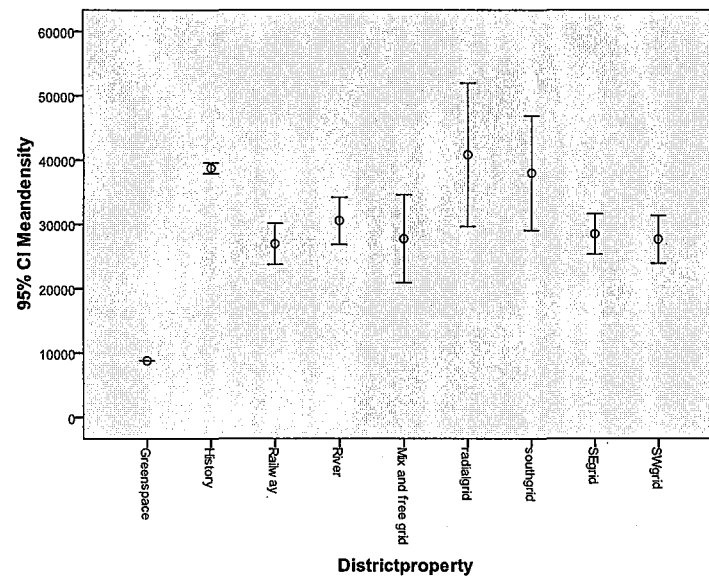


Fig 11: Density variation among district parameters

The districts need to be classified into central urban area, outer urban area and periphery urban area according to their proximity to the city centre. The chart below proves the effect of centrality on the urban density (Fig12).

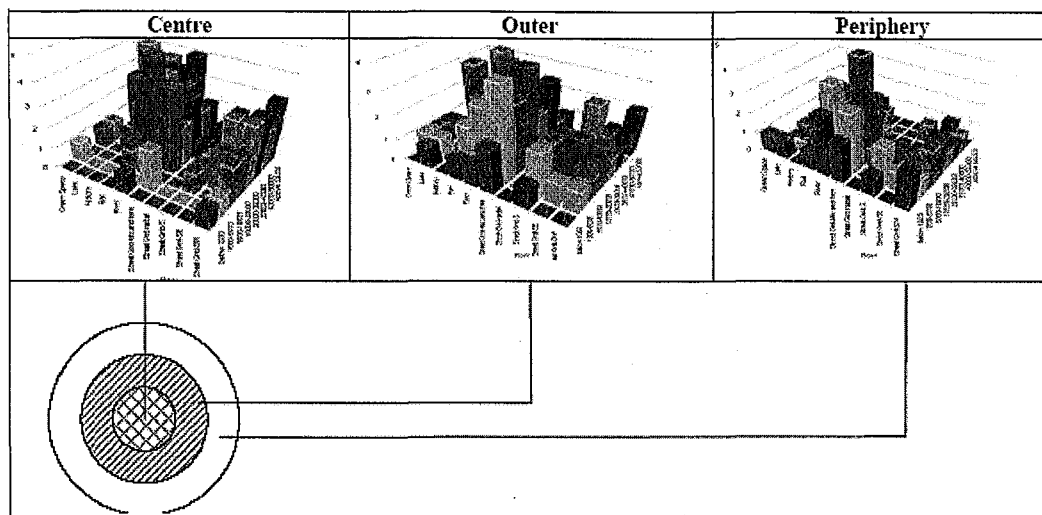


Fig 12: Number of districts surrounded with rail and river in each area

The chart shows the number of cities which have the districts that meet the two variables. The comparison of chart shows that in urban central area, outer central area and periphery, available districts cluster at different density ranges. This makes it necessary to analyse the research results separately in the three areas (Table 8). The outcome is displayed in 3D charts and line graphs (Fig13-16).

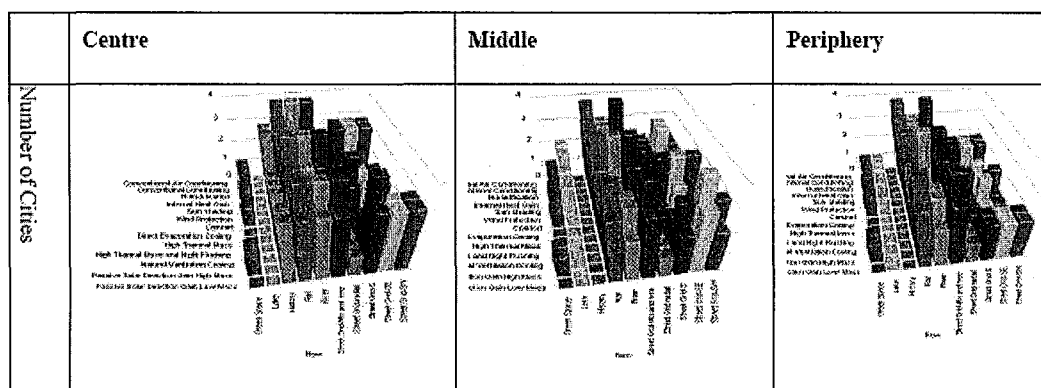


Fig13: Chart of qualitative analyses

Seen from the Fig14, the districts with radial street grid are the mostly consolidated, following the south oriented districts. In contrast, the southeast oriented and southwest oriented districts are less sensitive to the climate differentiations, thus their trend lines appear gentler. The districts surrounded by river and rail rank between the former mentioned two situations. All of them are in accordance with the general trend where the district population densities are generally high in the districts with the significant conventional conditioning, humidification, wind protection, direct evaporation cooling, high thermal mass and passive solar direction gain low mass, whereas the districts with significant conventional air conditioning, internal heat gain, sun shading, comfort, natural ventilation cooling and passive solar direction gain high mass indexes naturally come into relatively average low density districts.

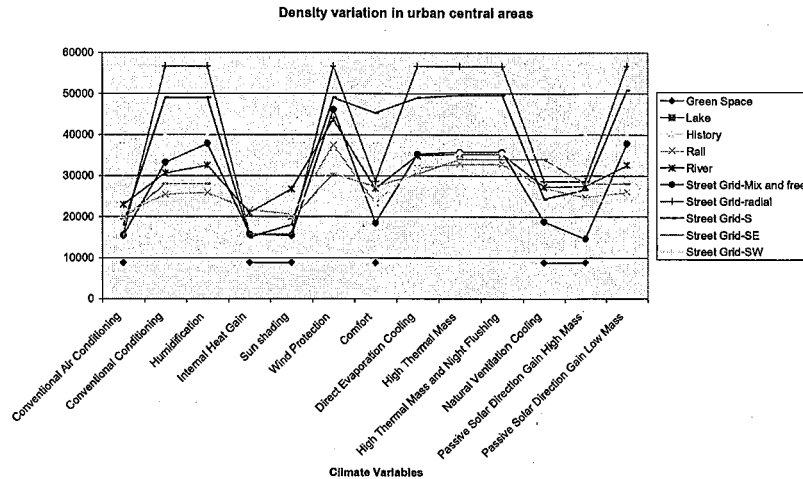


Fig 14: Responsive variables of density variation in central urban areas

Exception exists in the historical districts. The almost horizontal trend line shows that they are not sensitive to the local climate at all and the average density maintains around 40000 (p/km²) since historical districts are all concentrated in the urban central areas.

In the outer area of the central region, the trend is similar to the urban central area (Fig15). The districts with radial street grid continue to have higher average densities with significant conventional conditioning, humidification and passive solar direction gain low mass indexes. But they are overtaken by SE orientation districts with significant wind protection, direct evaporation cooling and high thermal mass indexes. Railways continue to negatively contribute to the district density but southern and mixed street grids are more negative in the outer central urban area. Definitely, SE and SW street grids would promote the urban district more positively in the urban central area than the central area. The effects of rivers are only obviously positive in districts with significant humidification and wind protection indexes.

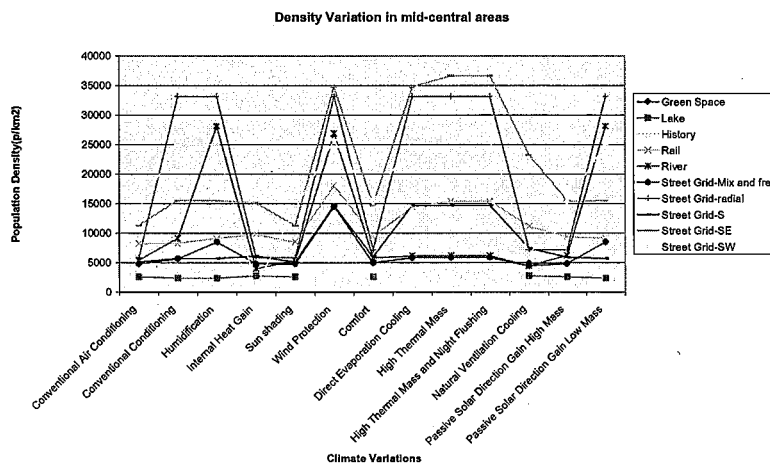


Fig 15: Density variation in outer central areas

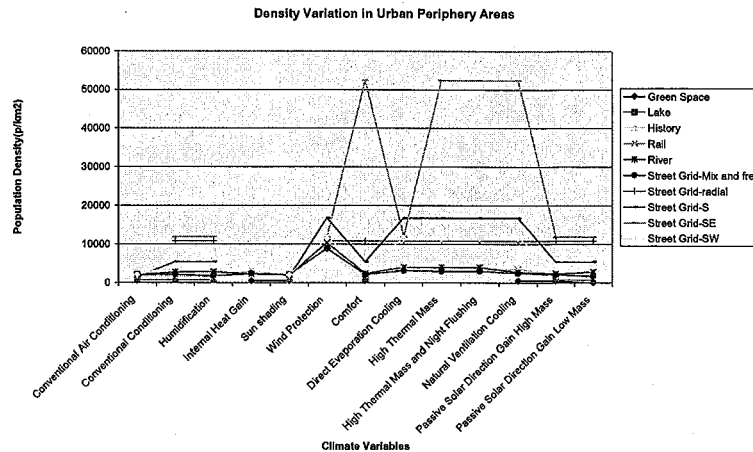


Fig 16: Density variation in urban periphery areas

In the periphery of urban areas, the trend with the climate variations still exist, but is much weaker than in conventional conditioning and humidification climate regions (Fig16). SE street grid is the most important factor in the comfort, high thermal mass and natural ventilation cooling significant climate regions, that is, the cities in lower latitude. SW street grid works positively in the same climatic regions, but it is inferior to the SE. On the other hand, southern orientation is best in wind protection, direct evaporation cooling significant climate regions.

Radial street grid is hardly found in the periphery areas since it usually has long history origins. River and rail follows the general trend but they are still neutral in the district density. Their slight distinctions could almost be ignored but they could be viewed as similar in contributing to the population density in urban periphery area.

Discussion

William Fawcett states that the density is unaffected by geographical latitude because whether the spacing of blocks could achieve a given intensity is wholly independent of building height or the obstruction angle. Instead, it depends on the depth of the building blocks.²³ But he ignored other climate factors that may influence the density. In the first part of the research, statistical studies on 85 Chinese cities shows that natural ventilation cooling is closely related to urban population density. High thermal mass, conventional heating and conditional air conditioning are not statistically significantly related. Two or more climatic factors would affect the urban density much more significantly, for example, sun shading- humidification, comfort-humidification, sun shading-internal heat gain, conventional conditioning-humidification etc (Table 8). Fewer cluster numbers will display more significant differences in density. But even in two climate clusters, the density difference is not significant enough when the entire six main climate indexes are considered.

Table 8: Compilation of influencing climate indicators for HSEFA

Type	Influencing Climate Indicators for HSEFA
Single Climate Indicators	Natural ventilation cooling
Combinational Indicators	Sun shading- humidification
	Sun shading-internal heat gain
	Comfort-humidification
	Conventional conditioning-humidification

Recommendations for higher densities in Chinese cities in urban central areas, outer central areas and in the urban periphery areas could be summarized into table 9.

Table 9: Recommended built environment for densification

Design Strategies	Cities	Recommended Built Environment for Densification		
		Central areas	Outer central areas	Periphery areas
Comfort	TJ, WH, SZ, CQ	S, History	SW, SE	
Sun shading	WH, SZ, CQ	History, River, SW	SW, SE	River
Internal Heat Gain	WH, SZ, CQ	Rail, river	SE, rail	Rail, river
Conventional Air Conditioning	WH, SZ, CQ	Radial, S, History	Radial, SW, SE	SE, Radial, SW
Conventional Conditioning	HB, TJ, WH, CQ	History, River, SW	SW, SE, Rail	Mixed Grids
High Thermal Mass	TJ, CQ	Radial, S	Radial, SE, SW	S, Radial, SE/W
High Thermal Mass/Night Flushing	TJ, CQ	Radial, S	Radial, SE, SW	S, Radial, SE/W
Direct Evaporation Cooling	HB, TJ, CQ	Radial, S	Radial, SE, SW	S, Radial, SE/W
Natural Ventilation Cooling	TJ, SZ, CQ	History, SW, SE	SE	SE
Passive Solar Direction Gain Low Mass	HB, TJ, WH	Radial, S, history	Radial, river, SW	Radial, SE
Passive Solar Direction Gain High Mass	HB, TJ, WH, SZ	History, radial, SE, river	SE, SW, rail	Radial, SE
Humidification	HB, TJ, WH	Radial, S, History	Radial, River, SW	Radial, SE
Wind Protection	HB, TJ	Radial, S	Radial, river, SE	S

In warmer climates, the commonly related design strategies are comfort, sun shading, internal heat gain and conventional air conditioning. Districts with higher density are usually historical blocks in central areas, slightly tilted blocks in outer central areas and river-surrounded blocks in the city periphery.

For example, in comfort zone, like Tianjin, Wuhan, Shenzhen and Chongqing, central city areas have higher densities when the blocks belong to the historical core or south oriented; the outer central areas are more southwest or southeast oriented in high density districts. In sun shading zones, like Wuhan, Shenzhen and Chongqing, central districts surrounding with the river or southwest oriented normally have higher density. In outer areas of sun shading zone, southwest or southeast oriented districts still tend to be higher density districts. In the periphery, rivers will contribute more to the district density.

In colder and drier climate zones, where the related design strategies are passive solar direction gain, humidification and wind protection, historical core continues to have higher density in central districts. Radial streets and southeast streets could achieve higher density in the whole city region.

For instance, Passive Solar Direction Gain Low Mass zone, like Harbin, Tianjin and Wuhan, historical origins, radial and south oriented streets will make a harder city core; Southwest streets and river play an important role in the outer central areas. In the periphery, the street direction turns to southeast in relative higher density districts.

In summary, this paper presents ongoing research based on the quantitative and qualitative analysis methods. Statistical analyses of the densities in 85 cities are followed by the performing of a comparative analysis of 5 cases study cities. Research shows that at the macro scale, the population density of the cities slightly varies when the regional climate changes. Among the six main climate indicators and seven subsidiary climate indicators, only one single indicator is closely related to the urban density. But the combination of two or more other indicators could also be indexes for evaluating the built environment. These indicators will be part of the HSEFA indicator framework (Fig 17). At the micro level, an in-depth investigation on 426 districts presents case studies of five typical Chinese cities in each climatic zone. It verifies the 13 climate indicators in the district level, and extends the vision into the specific parameters of urban form strategies. Recommendations from the five cities are shown in the cross-table for references.

Fig 17: Research results in the HSEFA framework

Analytical studies of five Chinese cities provide recommendations on better future solutions for urban densification. However, it is needed to carry out a complementary study to analyse other modalities of sustainability evaluation framework besides bioclimatic modality in future studies. Selected sustainable urban developments in each city will be evaluated with the validated framework to derive tools and recommendations on best urban practices. It is hoped that this paper will provide a discussion document for future research in the increasingly important area of sustainable urban form.

Acknowledgements

The authors would like to thank the anonymous referees for their constructive and useful comments during the development stage of this paper.

¹ G. H. Brundtland and World Commission on Environment and Development, *Our common future*. Oxford ; New York, Oxford University Press, 1987.

² UNCED *Agenda 21 : programme of action for sustainable development : Rio Declaration on environment and development* Rio de Janeiro, Brazil, United Nations Dept. of Public Information, 1992.

³ J. Peet, and H. Bossel, 'An ethics-based systems approach to indicators of sustainable development.' *International Journal of Sustainable Development* 3(3), 2000, pp. 221 - 238

⁴ PCE, *Creating our future: Sustainable development for New Zealand* Wellington: Wellington Office of the Parliamentary Commissioner for the Environment, 2002.

⁵ G. Xiong, *Study on the Morphology Evolution of Chinese Cities Since 1990s* Nanjing, Nanjing University, China, 2005

⁶ J. George and S. Dei, 'Indigenous Knowledge as an Empowerment Tool for Sustainable Development' In V. Titi and N. Singh, (eds) *Empowerment Towards Sustainable Development* Halifax, Fernwood Publishing, 1995; A. O. Phillips and S. O. Titilola 'The Cultural Dimension of Development-Indigenous Knowledge Systems' in D. Warren, M., L. Slikkerveer and D. Brokesha (eds) *Sustainable Development and Indigenous Knowledge Systems in Nigeria: The Role of the Nigerian Institute of Social and Economic Research* UK, Intermediate Technology Publications, 1995; W. Bank, 'What is Indigenous Knowledge: Definition and Bibliography Links.' [On-Line]. Available: www.worldbank.org/afr/ik/basic.htm, 1997; F. Berkes *Sacred Ecology: Traditional Ecological Knowledge and Resource Management*. Philadelphia, Taylor and Frances, 1999; Appleton, Fernandez, et al. 'Claiming and Using Indigenous Knowledge. International Development Research Center (IDRC).' [On-line]. Available: <http://web.cdrc.ca/en/ev.w 958-201-1-DD-Topic.html>, 2005.

⁷ E. Burton, M. Jenks, et al. *The Compact city : a sustainable urban form?* London ; Melbourne, E & FN Spon, 1996; K. Williams, M. Jenks, et al. *Achieving sustainable urban form* London, E. & F. N. Spon, 1996; M. Jenks and R. Burgess *Compact cities: sustainable urban forms for developing countries*. London, Spon Press, 2006; M. Jenks and N. Dempsey, *Future forms and design for sustainable cities* Amsterdam; Boston, Architectural Press, 2005; M. Jenks, D. Kozak, et al. *World cities and urban form : fragmented, polycentric, sustainable?* Abingdon, Oxon; New York, Routledge, 2008; P. Newman and J. R. Kenworthy *Sustainability and cities : overcoming automobile dependence* Washington, D. C., Island Press, 1999.

⁸ Anthony, J. 'Do State Growth Management Regulations Reduce Sprawl?' *Urban Affairs Review* 2004(1); E. Holden and I. T. Norland, 'Three Challenges for the Compact City as a Sustainable Urban Form: Household Consumption of Energy and Transport in Eight Residential Areas in the Greater Oslo Region' *Urban Studies* 42(12), 2005 pp. 2145-2166; R. Fincher, 'Is High-rise Housing Innovative? Developers' Contradictory Narratives of High-rise Housing in Melbourne.' *Urban Studies* 44(3), 2007 pp. 631-649; A. Forsyth, J. M. Oakes, et al. 'Does Residential Density Increase Walking and Other Physical Activity?' *Urban Studies* 44(4), 2007, pp. 679-697; M. Selugga, 'Development in China: high speed, high rise, high price.' *Topos: the international review of landscape architecture & urban design* (64) 2008 pp. 84-91; S. Sintusingha 'Sustainable "world class" cities and glocal sprawl in Southeast Asian metropolitans' in M. Jenks, D. Kozak and P. Takkanon (eds) *Southeast Asian Metropolitan World Cities and Urban Form: fragmented, polycentric, sustainable?* Abingdon, Oxon ; New York, Routledge 2008, p. ix, 373; P. A. Barter, 'Transport Dilemmas in Dense Urban Areas: Examples from Eastern Asia' in M. Jenks and R. Burgess (eds.), *Compact Cities: Sustainable Urban Forms for Developing Countries*, London: Spon Press, 2000 p. xi, p. 356

⁹ R. Green 'Not Compact Cities but Sustainable Regions' in E. Burton, M. Jenks and K. Williams, *The Compact city: a sustainable urban form?* London; Melbourne, E & FN Spon, 2000 p. x, p. 350; P. Newton, S. Tucker, et al. 'Housing Form, Energy Use and Green House Gas Emissions' in K. Williams, M. Jenks and E. Burton (eds) *Achieving sustainable urban form* London, E. & F. N. Spon 1999 p. 272; I. Mufiz and A. Galindo 'Urban form and the ecological footprint of commuting. The case of Barcelona.' *Ecological Economics* 55(4) 2005, pp. 499-514.

¹⁰ R. Register *Ecocities : rebuilding cities in balance with nature* Gabriola, BC, New Society Publishers 2006; M. Castells *The rise of the network society* Oxford ; Malden, MA, Blackwell

Publishers 2000; K. Williams, M. Jenks and E. Burton *Achieving sustainable urban form* London, E. & F. N. Spon 1999

¹¹ J. Feng and Y. Zhou 'The Spatial Redistribution and Suburbanization of Urban Population in Hangzhou City.' *Urban Planning* 01, 2002B. Liao, B. et al. 'Simulation and analysis of the population density of the Shanghai central city in 1990-2000' *Journal of East China Normal University (Natural Science)* 4, 2008; K. Liu et al, 'The spatial complexity of the law of allometric growth and urban population density.' *Journal of East China Normal University (Natural Science)* 4, 2004; A Lv, C. Li, et al. (2005). 'Modelling Urban Population Density with Remote Sensing Imagery' *Acta Geographica Sinica* 60 (1) 2005; L-R Ziu, , Z. Yuan, et al. 'Research on Spatial Structure of Urban Economic Development Based on Urban Density Zoning-Taking the New Town in Lijiang East of Guilin for Example.' *Journal of Qingdao University of Science (Social Science)* (03) 2008, 15-20

¹² Z. Tang and L. Fu 'A Rational Approach to Urban Density Zoning: the Case of Shenzhen Special Economic Zone' *Urban Planning Forum* 4, 2003; Y. Li and Y. Gao 'Actual Conditions and Public Policy Orientation over Urban Density in a State of Scarcity of Spatial Resource, Shenzhen (from 2000 to 2006) as an example Transformation of Spatial Density of Shenzhen and Policy Analysis, since 2000' *Urban Studies* 15, 2008; J. Feng and Y. Zhou 'The Spatial Redistribution and Suburbanization of Urban Population in Hangzhou City.' *Urban Planning* 1, 2002.

¹³ M. M. E. Nahas *Energy Saving through Urban Design - A Microclimate Approach*. Adelaide, University of Adelaide PhD thesis; B. Givoni *Climate considerations in building and urban design* New York, Van Nostrand Reinhold, 1998; R. Hyde, R. *Climate responsive design : a study of buildings in moderate and hot humid climates*. New York, E & FN Spon, 2008; P. F. Smith, *Architecture in a climate of change: a guide to sustainable design* Oxford; Boston, Elsevier/Architectural Press, 2005; C. Riedy *The Eye of the Storm-An Integral Perspective on Sustainable Development and Climate Change Response* Institute for Sustainable Futures. Sydney, University of Technology PhD Thesis; J. Corburn, 'Cities, Climate Change and Urban Heat Island Mitigation: Localising Global Environmental Science.' *Urban Studies* 46(2), 2009 pp. 413-427; E. M. Hamin and N. Gurran 'Urban form and climate change: Balancing adaptation and mitigation in the U.S. and Australia.' *Habitat International* 33(3) 2009, pp. 238-245.

¹⁴ W. Fawcett, 'A Note on the Obstruction Angle Model for Block spacing.' *Building and Environment* 18(3) 1983; Muneer, T., H. Kambezidis, et al. *Solar radiation and daylight models* Burlington, MA ; Oxford, Elsevier Butterworth Heinemann, 2004; H. D. Cheung and T. M. Chung, 'Analyzing sunlight duration and optimum shading using a sky map.' *Building and Environment* 42, 2007 pp. 3138-3148 A. Chel, G. N. Tiwari, et al. 'A model for estimation of daylight factor for skylight: An experimental validation using pyramid shape skylight over vault roof mud-house in New Delhi (India).' *Applied Energy* 86(11), 2009 pp. 2507-2519.

¹⁵ S. Liu, X. Li, et al. *Scenario Analysis on Urbanization and Rural-Urban Migration in China*. Laxenburg, Austria, Institute of Geographic Sciences and Natural resources Research, Chinese Academy of Sciences, 2003

¹⁶ Kumar, A. *Towards an Integrated Sustainability Assessment of the Built Environment: The Convergence of Ecological footprint and Spatial Analysis to Map the Urban Dynamics of a City* Sydney, The University of New South Wales PhD Thesis.

¹⁷ Y. -T. Hung, and K.-W. Tsou *Spatial-temporal changes of regional sustainability: an empirical study in Taiwan* WIT transactions on ecology and the environment. Southampton ; Boston, WIT 2006 pp. 239-249.

¹⁸ M. B. Miles and A. M. Huberman *Qualitative data analysis : an expanded sourcebook* Thousand Oaks, Sage Publications, 1994

¹⁹ N. K. Denzin and Y. S. Lincoln *Handbook of qualitative research* Thousand Oaks, Calif., Sage Publications 2000, p. xx, p. 1065

²⁰ B. Edwards *Sustainable architecture : European directives and building design* Oxford, Architecture Press, 1999

²¹ H. Zhang, *Study on the Thermal Environment of the City Based on the Simulation under Atmospheric Environment Impacts*. Wuhan, Huazhong University of Science&Technology. M. Arch, 2006 107.

²² Y.-H Tsai. 'Quantifying Urban Form: Compactness versus 'Sprawl.' *Urban Studies* 42(1), 2005 pp. 141-161; R. Lopez and H. P. Hynes 'Sprawl in the 1990s Measurement, Distribution, and Trends.' *Urban Affairs Review* 1, 2003.

²³ W. Fawcett 'A Note on the Obstruction Angle Model for Block spacing.' *Building and Environment* 18(3), 1983